

ASSEMBLING YOUR BIKE





GENERAL ASSEMBLY INSTRUCTIONS

Each TETSU e-bike has been carefully assembled and tested before leaving the factory. When packed we usually remove some or all of the following parts to ensure safe transportation:

- Front wheel
- Handlebar
- Seat post
- Pedals

NOTE: These parts can be very easily installed by following the guidelines below. If you have little or no experience with bicycle maintenance we recommend you get this done at your local bike shop.

ASSEMBLY STEPS

			
Fig. 1	Fig. 2	Fig. 3	Fig. 4
Front Wheel Assembly	Carefully position the wheel on the forks so that the disc fits in the small gap between the brake pads. The wheel should settle completely into the dropouts (Fig.2). First install the gasket, then install the nut, and finally tighten it with a wrench.(Fig.3,4)		

WARNING: ENSURE THE NUT IS FULLY TIGHTENED.



Fig. 5



Fig. 6



Fig. 7



Fig. 8

Handlebar Assembly

1. Align stem and tighten with Allen key.
2. Align the handlebar and tighten the 4 unit screws with the Allen key.(Fig.6,7,8)

WARNING: ENSURE THE HANDLEBAR IS FULLY IN PLACE.



Fig. 9



Fig. 10



Fig. 11

Seat post Assembly

1. Insert the saddle post and adjust the desired height of the saddle. (Fig.9,10) - correct saddle height
2. Close the quick release lever, ensuring it is tight. (Fig. 12)



Fig. 12



Fig. 13



Fig. 14 (WL=LEFT)

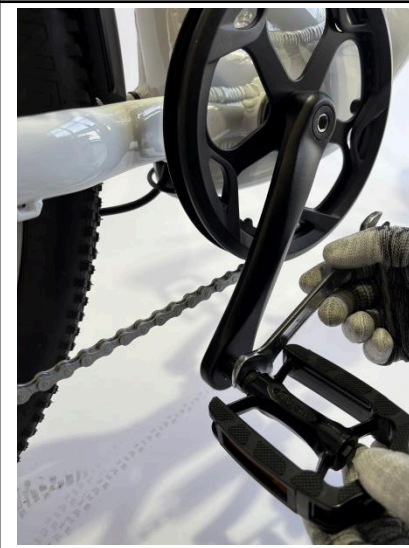


Fig. 15 (WR=RIGHT)

Pedal Assembly

There are two pedals (marked "WL" and "WR") included in the box with your bike (Fig. 12,13). The pedals screw into the ends of the cranks without extra nuts, screws or pins.

1. Screw each pedal into a crank by hand. (Fig. 14 & 15).
2. Use a spanner to tighten the pedal in place.